



Phang, Sendy and Vukovic, Ana and Creagh, Stephen C. and Benson, Trevor M. and Sewell, Phillip and Gradoni, Gabriele (2015) Threshold preservation of PT-resonant structures in realistic-dispersive medium. In: Optical Wave and Waveguide Theory and Numerical Modelling Workshop (OWTNM 2015), 17-18 April 2015, London, UK. (Unpublished)

**Access from the University of Nottingham repository:**

[http://eprints.nottingham.ac.uk/28917/1/paper-template\\_owtnm15\\_av\\_tb.pdf](http://eprints.nottingham.ac.uk/28917/1/paper-template_owtnm15_av_tb.pdf)

**Copyright and reuse:**

The Nottingham ePrints service makes this work by researchers of the University of Nottingham available open access under the following conditions.

- Copyright and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners.
- To the extent reasonable and practicable the material made available in Nottingham ePrints has been checked for eligibility before being made available.
- Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.
- Quotations or similar reproductions must be sufficiently acknowledged.

Please see our full end user licence at:

[http://eprints.nottingham.ac.uk/end\\_user\\_agreement.pdf](http://eprints.nottingham.ac.uk/end_user_agreement.pdf)

**A note on versions:**

The version presented here may differ from the published version or from the version of record. If you wish to cite this item you are advised to consult the publisher's version. Please see the repository url above for details on accessing the published version and note that access may require a subscription.

For more information, please contact [eprints@nottingham.ac.uk](mailto:eprints@nottingham.ac.uk)

# Threshold Preservation of PT-Resonant Structures in Realistic-Dispersive Medium

S. Phang<sup>1,\*</sup>, A. Vukovic<sup>1</sup>, S. Creagh<sup>2</sup>, T. M. Benson<sup>1</sup>, P. Sewell<sup>1</sup>, G. Gradoni<sup>2</sup>

<sup>1</sup>George Green Institute for Electromagnetics Research, Faculty of Engineering, University of Nottingham, UK

<sup>2</sup>School of Mathematical Sciences, University of Nottingham, Nottingham, UK

[\\*sendy.phang@nottingham.ac.uk](mailto:sendy.phang@nottingham.ac.uk)


The impact of material dispersion in the performance of parity-time (PT) symmetric coupled microresonators is studied. The eigenfrequencies of the coupled PT-system are analysed for different dispersion parameter. We show that realistic dispersion preserves the PT-system with additional stabilising features.

## Results and discussions

Photonic structures with balanced gain and loss, known as PT-symmetric structures, have been a subject of intensive investigation theoretically and experimentally, mainly due to the signature properties of the threshold point. Several applications exploiting the unique properties of PT-structures at the threshold point have been proposed such as, logical gate, memory, cloaking, and sensors. In this paper, we study the existence of the threshold point for PT-coupled microresonators and realistic dispersive material parameters that satisfies the Kramers-Kronig relationship.

The complex eigenfrequencies of PT-coupled microresonators are shown in Fig. 1 for three different dispersion parameters in the notation of [1], namely (A) non-dispersive, (B) weakly dispersive  $\omega_\sigma\tau = 1$  and (C)  $\omega_\sigma\tau = 212$  [2] for a realistic high dispersion. It can be seen that there is a distinct PT threshold in the case of non-dispersive (A) and highly dispersive (C) cases, but not in the case of weak dispersion (B). This is due to the fact that the gain/loss parameter alters the real part of refractive index of the material resulting in a structure that no longer satisfies the PT condition of  $n = n^*$  in the case of weak dispersion, but is maintained in the case of high dispersion.

In the talk, we will discuss the implications of dispersion on the performance of PT-coupled microresonators and why the threshold point is preserved in the case of realistic material dispersion. Furthermore, it will be shown that practical dispersion only allows the PT-symmetric condition to be met at a single frequency which consequently also forbids multi-mode PT-symmetry breaking.

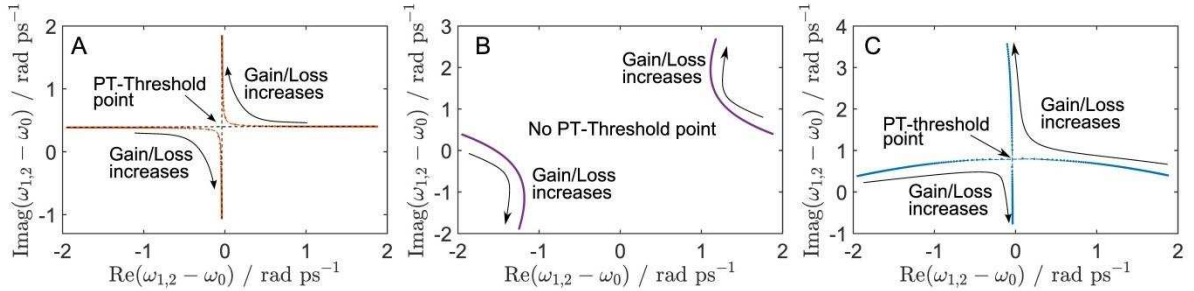

**Fig. 1.** Complex eigenfrequencies of PT-coupled microresonators for 3 different dispersion parameters, i.e. (A) non-dispersive, (B) small dispersion  $\omega_0\tau = 1$  and (C) realistic high dispersion. The structure is operated at a low Q-factor mode (7,2). Radius of each resonator  $a = 0.54\mu m$ , gap between resonators  $g = 0.24\mu m$ . For material model refer to [1].

## References

1. S. Phang, A. Vukovic, H. Susanto, T. M. Benson, and P. Sewell, "Impact of dispersive and saturable gain/loss on bistability of nonlinear parity-time Bragg gratings.," *Opt. Lett.* **39**, 2603–6 (2014).
2. S. C. Hagness, R. M. Joseph, and A. Taflove, "Subpicosecond electrodynamics of distributed Bragg reflector microlasers: Results from finite difference time domain simulations," *Radio Sci.* **31**, 931–941 (1996).